

RISKS REDUCING THROUGH INTELLIGENT HEADLIGHT MANAGEMENT: OPTIMIZING Q-LEARNING FOR ELECTRIC VEHICLES

Pitchaya Jamjuntr¹, Chanchai Techawatcharapaikul², Pannee Suanpang^{3*}

^{1,2}Department of Electrical Engineering, Faculty of Engineering
King Mongkut's University of Technology Thonburi
Bangkok, 10140, Thailand

³Department of Information Technology, Faculty of Science & Technology
Suan Dusit University, Bangkok, 10300, Thailand

Received: 21 May 2024

Accepted: 11 September 2024

First Online: 30 September 2024

Research Paper

Abstract: *This paper proposes an intelligent headlight management system for Electric vehicles (EVs) based on an adaptive Q-learning framework that considers enhancing safety and reducing risks. This includes formulating a Q-learning strategy for real-time control of headlights operating in modes suitable for the current conditions and vehicle operations. Evaluation of the performance of the adaptive Q-learning system is presented in this study in terms of safety metrics such as visibility distance and energy efficiency indicators such as power consumption through comprehensive simulations across various turning scenarios. These results show significant improvements compared to traditional systems with fixed beam patterns and rules-based control systems. This approach proves effective and expresses the research prospects of enhancing the safety of night-time driving, reducing risks, minimizing energy usage, and improving the overall performance of the approach with traditional routing methods, demonstrating its superior performance in various scenarios. This paper not only contributes to the optimization of last-mile delivery using shipping drones but also highlights the potential of reinforcement learning techniques, such as deep Q-learning, in addressing complex routing challenges in dynamic, real-world environments in smart logistics. Ultimately, further exploration into the utilization of reinforcement learning for complex optimization issues across various domains is recommended.*

Keywords: *Risks reducing; Intelligent headlight management; Q-Learning; Electric vehicles; Optimization*

*Corresponding author: pannee_sua@dusit.ac.th (P. Suanpang),
pitchaya.jam@kmutt.ac.th (P. Jamjuntr)

1. Introduction

A global trend is moving towards adopting electric vehicles (EVs) as a sustainable solution to transport industries (Alinazi et al., 2024). These vehicles are expected to have less reliance on fossil fuels, emit fewer greenhouse gases, and improve air quality, all of which assist in achieving global sustainability targets (Vaidya & Mouftah, 2020). Still, with the rise of EV usage comes the rise of disquiet on the safety and the overall functionality of these cars and the light-emitting parts of these cars. The intelligent management of headlights has become one of the directions of research whose importance cannot be overemphasized since it could significantly reduce the number of accidents and enhance road safety and energy efficiency when cars are used in various conditions (Munsi & Chaoui, 2024).

Headlights play a significant role when driving at night or in inclement weather. However, these systems are often limited to a specific light intensity, which is not always practical for all environments (Wei et al., 2022). This issue hampers the driver's visibility and causes unnecessary energy consumption in EVs, which run all electrical systems, including the lights on battery power. On the other hand, an adaptive lighting system can change the degree and angle of the headlights in response to other current road and traffic conditions, as well as situational variables like the presence of vehicles and pedestrians. If such technologies are utilized, the dangers of driving in darkness can be reduced, creating more appropriate and comfortable conditions for traffic movement and other road users (Zhang et al., 2021).

Q-learning can help achieve adaptive headlight control autonomously by interacting with the specific environment, where an agent learns from the environment (Nkrumah, Cai, & Jafaripournimchahi, 2024). Q-learning applies to headlight control as it helps provide dynamic decision-making based on situational awareness and headlight settings preferred by the driver. The approach is quite suitable for modern vehicles, particularly EVs, since they are ideal for data-driven systems that can learn over time (Zakaria et al., 2024). In addition, using the artificial headlight control based on a Q-learning approach may help increase drivers' segregated satisfaction levels (Suanpang et al., 2022). Most drivers have different driving habits and subjective preferences regarding the desired headlight brightness and direction of the beam due to differences in personal experiences (Tresca et al., 2024). Q-learning systems can learn these adjust preferences automatically, which improves the driving experience. Such accuracy is important because of the configuration within cities where drivers get frequent dynamic disturbances such as sudden weather changes, varying amounts of traffic, and obstructions such as buildings and trees that obstruct light (Vaidya & Mouftah, 2020).

Furthermore, communication of vehicle-to-everything (V2X) technologies can be incorporated within the framework of Q-learning to make the headlight management system more effective as it utilizes real-time input from the environment (Yusuf et al., 2024). For instance, cars can warn each other of imminent dangers like roadblocks, pedestrians, or cyclists, enabling the headlight system to adjust. Studies show that V2X integration with innovative systems can significantly improve traffic safety and efficiency (Zhou et al., 2020). Integrated with Q-learning, V2X technologies can enhance the intelligent headlight management system's functionality, address safety issues associated with driving at night, and achieve an ideal smart city scenario where

Risks Reducing Through Intelligent Headlight Management: Optimizing Q-Learning for Electric Vehicles

vehicles and infrastructure communicate for efficient traffic control (Ying et al., 2024). Additionally, other challenges must be solved to harness Q-learning in intelligent headlight management fully. Among such a challenge is creating an appropriate and diverse dataset that represents the complexity of driving in different conditions (Mande & Ramachandran, 2024). The learning model demands highly voluminous and rich data to optimize its decision-making issue.

Developing a well-performing generalized model across various scenarios such as geographical locations, weather conditions, and times of the day, will be critical (Jamjuntr et al., 2024). In addition, it is necessary to take care of ethics about data privacy and security of the data about the drivers from whom the data was drawn. Another interference is the real-time Q-learning implementations with computational complexity and the time required to carry out processes (Souri et al., 2024). It renders the algorithm incapable of instantaneously issuing control and lighting changes, as even short delays could reduce driving safety. So, it is evident that efficient hardware systems and high-level algorithms that can rapidly update Q-values based on the newest experiences will be required (Sutton, 2018). Additionally, the acceptance of automated systems capable of assuming user vehicle control functions will have to be addressed, as some drivers may not be willing to give up control to AI. Finally, it may be possible to diminish the hazards of night-time driving by integrating a headlight management system that uses a Q-learning framework to manage artificial headlamps in EVs (Souri et al., 2024). Such systems, when powered with the capabilities brought about by adaptive lighting technologies, reinforcement learning sequences, and V2X communication, can improve road safety and increase the efficiency of EVs (Sutton, 2018). However, obstacles to be addressed include data acquisition, computational efficiency, and user acceptance, but developing such intelligent systems may be the future of transportation. Research and development in this field will be paramount to creating a safe, adaptive, and sustainable driving environment.

Intelligent headlight management using a Q-learning framework is expected to provide significant safety benefits. Such systems can increase visibility for drivers while reducing glare to other road users by automatically modifying lighting patterns that align with the existing conditions. The system automatically dims the headlights when it sees an oncoming car so the driver is not blinded (Chen et al., 2025). Also, the systems can alter the position and strength of the headlights if the sensors detect that the vehicle is moving around a bend so that the headlights are more effective in lighting the road ahead. This ability not only enhances driver situational awareness in the short run but also helps protect pedestrians, cyclists, and other vehicles effectively (Zhong & Wang, 2025). Nevertheless, some obstacles still need to be overcome to fully tap into the benefits of intelligent headlight management systems for electric vehicles. First, such advanced development and deployment also come at a cost, particularly regarding skill and investment in research and development. The algorithms should be thoroughly validated to make sure they adapt and perform to the required standards under a variety of situations, such as weather changes and traffic volume (Ying et al., 2024). In addition, the existing legal aspects must be altered to allow these versatile systems to be incorporated and used by the guidelines provided by relevant transportation authorities (Song et al., 2024). Another equally important aspect in this case is consumer acceptance. Many drivers may be averse to having automated control of headlight systems, arguing that manually operating lights are a better option.

Awareness and education campaigns are very important in ensuring drivers know the advantages intelligent systems possess in managing headlamp systems and eliminating fears of mistrust of the systems. Such an approach could include the cooperation of automotive companies, law enforcement agencies, and safety organizations to educate the public about the necessity and advantages of adaptive lighting as a critical safety element (Zhou et al., 2024).

1.1 Research Gap

Despite advancements in the automotive and machine learning domains, a significant research gap exists concerning integrating and optimizing adaptive headlight management systems tailored explicitly for EVs using intelligent frameworks like Q-learning. Current literature and existing systems are limited in several ways:

Lack of Context-Aware Headlight Control: Most traditional headlight systems use static or rule-based methods that fail to adapt effectively to dynamic and complex driving scenarios. While adaptive lighting systems exist, they often rely on heuristic or predefined patterns that do not optimize real-time decision-making based on environmental and traffic conditions (Crosato et al., 2024).

Insufficient Use of Machine Learning Techniques: Although some studies have employed machine learning for headlight control, few have explored reinforcement learning frameworks like Q-learning to manage headlights adaptively. There is limited research on how these algorithms can autonomously learn and optimize headlight behaviour based on live feedback from onboard sensors, enhancing visibility and safety without manual intervention (Alanne & Sierla, 2022).

Focus on Energy Efficiency in Headlight Management: Limited studies address the dual challenge of maximizing visibility while optimizing energy consumption, which is crucial for EVs. The trade-off between efficient lighting and energy management remains underexplored, especially when considering the battery constraints specific to electric vehicles (Mathurkar & Satal, 2024).

Evaluation Across Diverse Driving Conditions: Most existing approaches to headlight management have not been rigorously tested across a comprehensive range of scenarios, such as varying road conditions, weather patterns (like fog or rain), and different levels of traffic density. The effectiveness of Q-learning-based solutions under such diverse and realistic conditions has not been thoroughly investigated (Morden et al., 2023).

Consumer Acceptance and Practical Implementation: While technological advancements in intelligent headlight systems have been proposed, there is a lack of research on user acceptance and the practical deployment of these technologies in everyday driving. Moreover, the social and regulatory implications of integrating automated headlight systems in EVs need more attention (Kumar et al., 2024).

Addressing these gaps can lead to developing more adaptive, efficient, and user-friendly headlight management systems, ultimately reducing risks and enhancing safety for all road users. This paper seeks to fill these gaps by implementing and evaluating a Q-learning-based framework that optimizes headlight control for EVs,

Risks Reducing Through Intelligent Headlight Management: Optimizing Q-Learning for Electric Vehicles

balancing safety and energy efficiency in real-time driving scenarios.

1.2 Current Challenges

Headlight management in EVs currently utilizes static or relatively simple rules or patterns controlled by conventional headlights. These rules or instructions are not satisfactory and adjust too little to the expected responsiveness in changing and varying factors such as the condition of roads, weather conditions at particular times, or vehicular speeds, which causes inadequate safety and energy efficiency performance (Waykole et al., 2021). Furthermore, present systems do not harness the advantages of adopting real-time data-driven control adjustments to improve safety and performance.

1.3 Objective

The main aim of this paper is to showcase how adaptive Q-learning can be effectively utilized to optimize the control of an electronic vehicle headlight. The objective is to devise a system capable of changing beam patterns automatically in light of real-time sensor information and vehicle dynamics using Q-learning, a reinforcement learning method known to acquire optimal control actions in changing environments. Such an approach is expected to increase safety through better visibility, while energy efficiency is expected to be improved by reducing light wastage.

2. Literature Review

This section reviews the history of intelligent driving technologies and their implementation in light of the advancements in headlight management systems.

2.1 Intelligent Driving Technologies

The automotive industry is shifting significantly because of the development of smart driving technologies, particularly on issues relating to safety and security, consumption of energy, and pollution in the environment. Intelligent driving looks into the application of sensors, communication systems, artificial intelligence, and machine learning to the working of the car. These systems enable vehicles to detect changes happening on the road and then to make and implement decisions based on them (Olawade et al., 2024).

2.1.1 Integration of Sensors in Intelligent Vehicles

Modern vehicles are equipped with a wide range of sensors designed to acquire knowledge regarding the environment around the vehicle, how it functions, and what the driver prefers. Examples of this include light sensors, proximity sensors, cameras, as well as radar systems, which give the ability to perceive prevailing conditions of the road and the environment around the vehicle (Chen et al., 2025; Vaidya & Mouftah, 2020). The captured information is used as the basis for intelligent systems' decisions. In particular, light sensors are essential for systems that control headlights since they control beam intensity with ambient lighting and use radar sensors to scan for vehicles and obstacles (Chen et al., 2025). This combination improves the view while decreasing glare and hence, eliminates some risks.

2.1.2 Role of Communication Systems

The ability of vehicles to communicate with each other and their surroundings Vehicle-to-Everything (V2X) is one of the most important aspects of autonomous driving solutions. V2X allows for information exchange between vehicles, facilities and other traffic participants for the purpose of joint control and anticipatory control. In terms of headlights, V2X technologies allow the sharing of data like traffic volume on the road, dangerous situations on the road, and the weather. These data can be used by headlight control algorithms to adjust the beam settings in anticipation of specific situations in order to provide sufficient light while avoiding wasting electricity (Evans et al., 2024; Zhou et al., 2020).

2.1.3 Machine Learning and Autonomous Decision-Making

Triumphing in intelligent driving technologies are now machine learning systems, especially reinforcement learning methods such as Q-learning. These methods allow the vehicles to be self-sufficient in coping with various scenarios by learning from the past and the environment. In headlight management, Q-learning algorithms can be used to provide optimal beam patterns by addressing the safety and energy consumption trade-off in real-time. Research has shown these systems are superior to the conventional rule-based in terms of their operational scope under various driving conditions (Ghaleb & Mirzaliev, 2024; Vaidya & Mouftah, 2020).

2.1.4 Adaptive Headlight Systems

Adaptive headlight systems are a significant improvement when it comes to intelligent driving technologies. Unlike static or rule-based systems, adaptive systems actively change the beam angles, intensity, and spread concerning instantaneous parameters. For example, headlights can turn during a bend to shine better on the road ahead and narrow the sight angle (Nkrumah, Cai, & Jafaripournimchahi, 2024). Such systems operate based on a large amount of data processing with machine learning algorithms, where the models learn how to configure lights optimally to make car usage more convenient and the road safer. Furthermore, adding adaptive systems with Q-learning allows the algorithm to learn and improve over time, as the model continuously updates its decision-making process based on collected data (Nkrumah, Cai, & Jafaripournimchahi, 2024).

2.1.5 Challenges in Implementation

Revolutionary driving technologies have their work cut out for them. The high development price, the intricacy of computation, and the robustness of the datasets required are some significant roadblocks that impede their progress. Delays in video collection or processing can compromise safety, particularly in headlight management situations where quick processing and reaction are imperative (Ghaleb & Mirzaliev, 2024). The other points for consideration are public acceptance and legal issues, which would help in the more extensive integration of automated systems. There is also a need for serious reflection on privacy issues regarding data gathered by intelligent vehicles so that the users' trust can be developed (Ghaleb & Basri, 2024; Kamil & Abdulazeez, 2024).

Risks Reducing Through Intelligent Headlight Management: Optimizing Q-Learning for Electric Vehicles

2.1.6 Future Directions

The growth of intelligent driving technologies will grow as artificial intelligence, sensors and communication networks evolve. Future research will probably be more about making these systems more effective and cheaper to fit on more cars, including low-end models. Automakers, technology developers, and regulators have to work together to develop and promote standards and regulations for intelligent systems. Also, the associated artificial intelligence systems can benefit from accurate big data and cloud-based algorithms to facilitate robust processes toward improved and more secure methods of driving (Sharma & Shivandu, 2024). In summary, one can consider that technologies in intelligent driving constitute the major pillar around which innovations in the automotive world revolve, providing remarkable answers to address ever-rigid demands such as safety and efficiency. These technologies utilize improvements in sensors, communication systems, and machine learning to alter the very future of the automobile and the role it plays in society, where technologies such as intelligent headlight management systems are only the beginning of what is possible.

2.2 Headlight Control Technologies

The evolution of headlight control in electric vehicles (EVs) has progressed from traditional static systems to more adaptive and sophisticated approaches. Early EV models often employed rule-based systems that relied on fixed patterns determined by parameters such as vehicle speed or ambient light levels (Hussein et al., 2024; Rani & Jayapragash, 2024). While these systems brought some functionality, the incapacity to adapt to a dynamic road condition limited its success in terms of safety and energy efficiency. Adaptive control approaches have emerged as promising alternatives against this. These systems leverage sensor data on real-time ambient light levels, weather conditions, and vehicle speed to adjust dynamically the headlight beam pattern (Mahadevan & Gurusamy, 2021). Adaptive systems work to continuously improve light distribution and effective visibility while reducing energy consumption to increase the range of EVs and enhance the overall experience behind the wheel. With the recent progress in sensor fabrication and new fast computational algorithms, interesting goals of creating adaptive systems capable of intelligent interaction with the external environment have become accessible. This versatility increases the safety of EVs by providing the necessary illumination level and also helps to lower the ecological footprint of EVs through effective energy containment systems (Zhou et al., 2024).

The adaptive headlights illustrated on EVs directly incorporate the control logic that relies on the sensor measurements; therefore, it involves intelligent decision-making logic (Figure 1). The system incorporates a light sensor to determine if it is day or night using ambient light and a speed sensor to oscillate between low and high beams depending on grain level. A front camera sensor is installed in the car, which turns high beams into low when the camera captures nearby vehicles and is no longer helpful. At the same time, a weather sensor tackles situations in which external conditions like rain and fog can qualify the beam pattern used. This way, the autonomous feature of the EVs allows the vehicle to change headlight settings every time sturdily, thereby saving energy, increasing the vehicle's range, improving the driving experience while using the EV (Zhou et al., 2024).

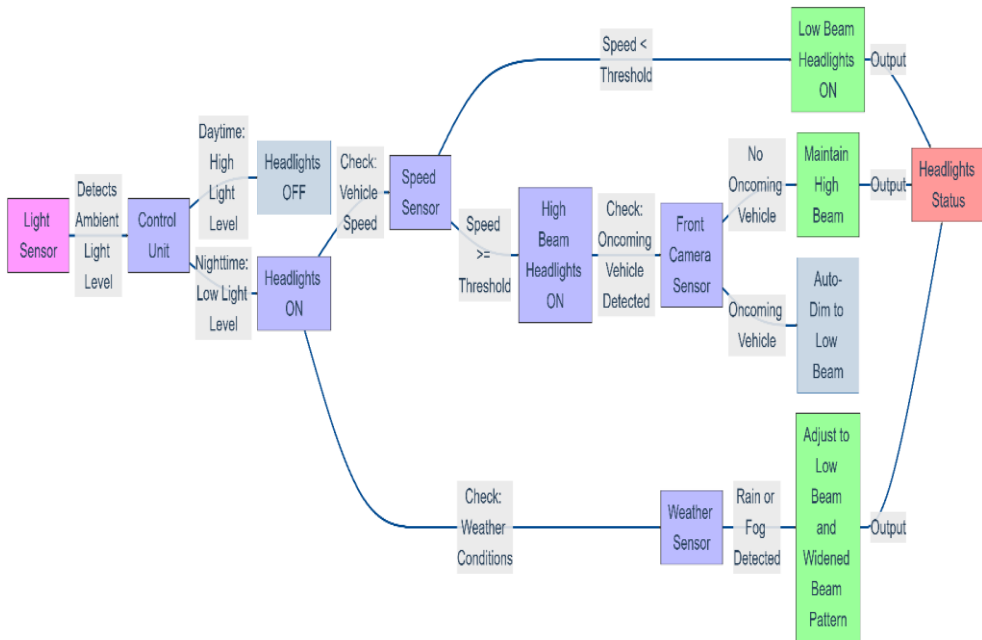


Figure 1: Adaptive headlight control system for EVs.

2.3 Intelligent Control System

Intelligent control systems are a new generation of systems that can revolutionize automotive engineering since they can utilize sophisticated algorithms and real-time data and processes to improve the performance and safety of automobiles as systems. Artificial intelligence, machine learning, and sensing technologies are incorporated into these systems to control complicated and changing situations while driving. This section examines the evolution as well as application and problems with intelligent control systems and their impact on the functions of the AVs and energy savings.

2.3.1 Core Components of Intelligent Control Systems

In modern architecture of vehicles, an intelligent control system typically contains multiple loosely coupled components that are meant to perform many tasks, sharing an intelligent style similarly done by humans. These include:

Perception Layer: Employing sensors, radars, and cameras to extract useful information from the environment and the internal condition of the car. For example, Lidar, radar, and ultrasonic sensors are used to locate hindrances against vehicles. Engine functions and primitive controls by the driver are also noted (Rana et al., 2023).

Decision-making Algorithms: These algorithms are critical in intelligent control systems as they allow acquired data to be processed, future events predicted, and the best course of action determined. Reinforcement learning (RL) and neural networks have been widely used to model decision-making processes under conditions of uncertainty (Xu et al., 2023).

Execution Mechanisms: These include actuators and regulators where the

Risks Reducing Through Intelligent Headlight Management: Optimizing Q-Learning for Electric Vehicles

regulators are used in executing decisions such as the decision to adjust angle of steering, to stop through brakes and changing engine power output (throttle) (Vaibhav et al., 2022).

This set of components works in the feedback configuration, which allows the system to respond rapidly to environmental changes with the effective and efficient fulfilment of specified goals, including safety, comfort, energy efficiency, etc. (Liu et al., 2023).

2.3.2 Applications in Autonomous Vehicles

The performance of a vehicle without driver is made possible through the intelligent control systems, some of their principal applications are:

Path Planning: As has been done in the past, navigation systems make use of algorithms such as A* and Dijkstra's. Nonetheless, nowadays with the use of deep reinforcement learning (DRL), several approaches are able to dynamically optimize a path regarding blocking objects, traffic, and road state (Li et al., 2024).

Collision Avoidance: Intelligent control systems integrate predictive models and sensors to avoid accidents through evasive movements. Individual motor vehicles enabled by multi-agent reinforcement learning (MARL) can work with other vehicles on the road to make travelling safer. (Rezaee et al., 2024).

Energy Optimization: These systems control regenerative braking, motor control, and battery management to reduce power consumption in EVs. According to other studies, Proximal Policy Optimization (PPO) has been able to save a lot of energy through adaptive control strategies (Jia et al., 2024).

2.3.3 Role in Driver Assistance

Intelligent control systems further improve high-level driving assistance systems (ADAS) in semi-autonomous vehicles for features such as adaptive cruise control, lane-keeping, and automated parking. Such systems incorporate predictive analytics that allows for a better understanding of the driver, as well as the motor environment, thus producing a better driving experience. Intelligent cruise control systems, for instance, are able to constantly change the speed of a vehicle so that it averagely maintains a predetermined distance from the vehicle ahead, hence minimizing the likelihood of rear collisions and driver fatigue. Moreover, RL-based intelligent parking systems continuously learn new ways to park cars in a more efficient manner, allowing for complicated parking even under complex configurations (Mehta et al., 2023).

2.3.4 Control Strategies and Algorithms

Intelligent control systems employ a variety of methods to define the scope and extent of their capabilities, such as the ability to respond dynamically in real-time as opposed to being strategically optimal over some time. Among the frequently utilized algorithms are:

Model Predictive Control (MPC): This algorithm is applied for control and trajectory planning. It aims to optimize the control input by predicting the system's behaviour within a limited period (Chen et al., 2024).

Fuzzy Logic Control: The control decision-making and programming that utilizes

fuzzy pull logic are the most appropriate methods whenever there are uncertainties and imprecision of the sensor data and cases when the system requires smooth and flexible logic (Tang & Ahmad, 2024).

Reinforcement Learning (RL): RL is a framework where the control system designer specifies the goals, and the RL-based heuristic controller solves the problem. Controllers based on RL learn simply by interacting with an environment and thus become robust in a variety of applicable situations. Q-learning and actor-critic methods are commonly employed techniques in autonomous driving technologies (Srinivasan, 2023).

2.3.5 Challenges in Intelligent Control Systems

Consequently, even though an intelligent control system has demonstrated capabilities to address a vast array of requirements, the following factors contributed to its limited implementation widely:

Data Quality and Availability – The quality, precision, and quantity of supplementary training data available dictate the capabilities of an intelligent system. Shortage in datasets results in poor or unacceptable levels of confidence in decisions made (Aldoseri et al., 2023).

Computational Complexity—Substantial computing power is required for the algorithms to function efficiently, which may be an encumbrance to implementing the systems into automotive vehicles (Devane, 2023).

Integration with Legacy Systems—Inserting intelligent control systems into operational motor vehicles involves cost and compatibility issues with existing motors (Jasiūnas et al., 2021).

Additionally, these systems need to be able to function even under extreme conditions, including operational and communication failures, geographic obstacles, etc. (Jasiūnas et al., 2021).

2.3.6 Future Directions

Intelligent control is expected to develop in the direction of improvement of their flexibility, expandability and understandability. Suggested key points are:

Multi-Agent Cooperation: Allowing cars to collaborate to optimize congestion management and safety by sharing information and making joint decisions.

Edge Computing: Transferring computations done on the cloud to the vehicle hardware to lower response time and enhance trustworthiness (Kelly, 2024).

Explainable AI (XAI): Creating systems with simple models to foster faith in them and obedience to governmental bodies (Hamida et al., 2024).

The trend in hybrid control strategies which integrate conventions with artificial intelligence techniques is also emerging as a promising area of research and develops the expected robustness and flexibility (Bathla et al., 2022; Parambil et al., 2024)

2.4 Q-Learning in Automotive Applications

One of the algorithms within the reinforcement learning category is the Q-learning

Risks Reducing Through Intelligent Headlight Management: Optimizing Q-Learning for Electric Vehicles

algorithm. This algorithm is attracting attention in automotive applications due to its ability to devise reasonable control strategies that compact with ever-changing environments (Liu et al., 2023). With respect to EVs, Q – Q-learning has some benefits from sequential headlight control as compared to the traditional rule-based or static approaches. The advantages are illustrated below:

Practitioners in Q-learning are remarkable as they need less supervision and can effectively provide full-fledged solutions, such as a dynamic headlight system, even when the driving conditions are altering (Santos et al., 2024).

As Q-learning absorbs the experience of controlling various aspects of the driving system in the real world and adjusts to ever-changing scenarios, it cross-evolves with multiple factors, enabling full control of headlights for safety and efficient energy use. (Santos et al., 2024).

In situations where certain areas of the environment do not need the help of a headlight beam, Q-learning is smart enough to redirect them elsewhere, increasing energy efficiency and even enhancing performance (Yang et al., 2024).

With regards to the implementation of Q-learning aimed at vehicle skin light control adjustment, this is quite a revolution in the approaches employed in automobiles. Other research emphasizes the potential of Q-learning in a number of applications, such as autonomous driving vehicles, route planning, and energy management of autonomous systems (Wei et al., 2022; Yang et al., 2024). The idea of the redevelopment of headlight control through Q-learning technique adjustment will help overcome several problems with the headlights of the vehicles and thus improve. EV design and safety standards in future EVs. Moreover, combining Q-learning with self-adaptive control techniques is a significant revolution in EV technologies. This means better safety, more energy efficiency, and improved driver satisfaction. Future studies might explore operational aspects and further development to meet the growing demand for sustainable mobility efforts.

2.4.1 Comparative Analysis of Existing Headlight Management Approaches

In order to provide a baseline for the headlight controller design, it is important to analyse the state of the art of EV headlight management strategies. These can be grouped into three broad categories: static rule-based systems, sensor-driven adaptive, and intelligent machine learning-driven systems. A comparison of their advantages and disadvantages illustrates the originality of the Q-learning methods:

This analysis indicates that conventional headlamp control systems are not enough to meet the fast-changing needs of a contemporary electric vehicle. The proposed Q-learning-based system provides a possibility for change for the better as it integrates reinforcement learning. This development, when integrated, may enhance safety and energy efficiency along with flexibility, effectiveness, and intelligent decision-making in real-time, thus making further applications of reinforcement learning in intelligent driving technologies even wider. To clarify some issues related to the distinctive characteristics of Q-learning, the following section outlines its comparison with other decision-making and control methods, with a focus on the specific advantages of Q-learning.

Table 1: Comparative Analysis of Existing Headlight Management Approaches

Approach	Strengths	Weaknesses	Novelty of Q-Learning
Static Rule-Based	Simple, reliable, cost-effective	Lack of adaptability, inefficient, limited to simple scenarios	Q-learning offers adaptability and optimization.
Adaptive Sensor-Driven Intelligent ML-Based	Real-time response, improved efficiency, and safety Adaptability, optimization, scalability	Reliant on sensor quality, limited predictive capability, high cost Computationally intensive, data-dependent, reliability challenges	Q-learning provides proactive decision-making and learns from experience. Q-learning offers simpler implementation and efficiency while maintaining performance.
Q-Learning-Based	Adaptability, efficiency optimization, simplicity, proactive decision-making, scalability	Potential for computational overhead	A unique combination of reinforcement learning for headlight control offers significant advantages over existing approaches.

2.4.2 Comparison

The advanced Engineering techniques for decision-making and control systems have also resulted in investigating several approaches such as rule-based, heuristic, and several machine learning solutions. Each of these approaches meets some requirements but also has its own limitations. One such promising method that has surfaced is Q-learning, a reinforcement algorithm that has the capability to instantly switch between different environments and learn the best possible policies while interacting with the system (Antonopoulos et al., 2020).

2.4.3 Rule-Based Systems

Just as their name implies, rule-based systems follow a predetermined set of rules in their decision-making processes. This sounds beneficial because it's easy to apply these systems and they don't take much computing power. However, it also means that they are only useful in areas that can be perceived as non-dynamic or predictable. The problems arise when the systems deal with complicated situations, as they do not seem to transfer or learn well (Machado et al., 2024).

2.4.4 Heuristic Methods

The heuristic method is defined by using judgmental or simpler rules to arrive at the desired solution. It's less risky and less costly than seeking answers through exhaustive search methods, but it's only effective if the heuristics used are sound in logic and construct, so there's often a risk of not reaching the optimal answer (Azevedo et al., 2024).

2.4.5 Machine Learning Approaches

There's a growing body of literature on supervised and unsupervised machine learning, and many have been quite impressed with these two's modelling and forecasting abilities. When faced with intricate and multi-dimensional problems, these variants can perform well across different contexts. Nonetheless, large amounts of labelled data and processing power are often prerequisites, ironically limiting its use in real-time or low-data situations (Taye, 2023).

Risks Reducing Through Intelligent Headlight Management: Optimizing Q-Learning for Electric Vehicles

2.4.6 Boundless Attributes of Q- Learning

Q-learning faces no competition in that it integrates the abilities of learning by trial and error with adaptability. In contrast, Q-learning can construct its own strategies based on the environment's response rather than relying on heuristics or rule-based systems. This capability allows it to effectively compete with stochastic and dynamic variables, as in the case of EV charging optimization or Real-time traffic management (Manakitsa et al., 2024). In addition, Q-learning does not rely on labelled datasets, an important drawback of other traditional machine learning methods. It then seeks for active collaboration with the environment which makes it ideal in scenarios where labelled information is insufficient or when the environments keep changing (Alzubaidi et al., 2023).

2.4.7 Comparison Perspective

The comparing table shows some of those differences and allows us to understand the basic advantages of Q-learning. It can adjust and learn on the go, making it perfectly suited for managing anything complex. True, its training phase can be quite resource-intensive. However, policies one gets from this process tend to be better than those gotten from other more efficient methods in terms of utility in dynamic settings (Papadopoulos et al., 2024).

Table 2: Comparison Addresses the Differences Between Rule-Based Systems, Heuristic Techniques, Various Machine Learning Methods, and Q-Learning

Issues	Rule-Based	Heuristic	Other ML Approaches	Q-Learning
Context	Based on predefined rules and logic, often tailored to specific scenarios without adaptation.	Utilizes heuristic strategies or expert knowledge to approximate solutions.	Employs general-purpose machine learning models for prediction or decision-making.	Adaptive learning through trial-and-error interaction with the environment to optimize policies.
Benefit	Simple to implement; requires minimal computational resources.	Faster computation compared to exhaustive searches; can yield good approximations.	Flexible and can generalize to a variety of contexts; capable of leveraging large datasets.	Learns optimal solutions dynamically; adaptable to complex and dynamic environments.
Limitation	Inflexible; fails in complex or dynamic scenarios; relies heavily on human expertise.	May not find globally optimal solutions; highly dependent on quality of heuristics used.	Often requires large labelled datasets; high computational complexity; lacks real-time adaptability.	Requires significant computational resources for training; performance depends on exploration-exploitation balance.

2.4.8 Future Prospects

Nurtured by the optimization of decision-making in real-time, Q-Learning can also be used in many intelligent systems, which have many doors to their advancement in the centre of future research work. This may involve combining Q-learning with other machine-learning techniques in order to reduce the computational cost and increase

the scalability and efficiency of such models (Qi et al., 2024). What is unique regarding Q-learning is that it can learn new solutions in a dynamic manner which makes it very versatile. The following comparison addresses the differences between rule-based systems, heuristic techniques, various machine learning methods, and Q-learning.

2.5 Advantages of Q-Learning

Q-learning is superior in certain key aspects:

Integration and On-the-Fly Improvements: In contrast to both rule-based and heuristic techniques, Q-learning adjusts strategies on its own as it learns and practices from the most recent information received. Hence, this allows optimum solutions for intricate and ever-changing aspects like stochastic traffic probabilities or other stochastic factors.

Need for Data: Other machine learning methods require quite a few required labelled datasets, and Q-learning is not one of them. There are situations where such datasets are not available or the conditions are really fluctuating, and this method works best by concentrating on the environment.

Idleness Deficiency: Because Q-learning is a continuous process and requires feedback, its advancements can be applied to areas that interface with few data resources, such as optimizing an electric vehicle's charging system, managing traffic in real-time, or controlling headlights dynamically.

The merits of Q learning, especially the self-adaptation to change and the ability to make decisions in real-time, position Q learning as an effective, transformative technique in car and intelligent systems applications. The only disadvantage is the temporal cost during the learning process training. However, since the system is capable of real-time optimization with no learning supervision, it is best used in complicated systems where change occurs at a fast pace.

2.6 Risks Reducing through Intelligent Headlight Management

Driving at night or in bad weather is risky, mainly due to poor visibility and difficulty managing the headlights. Most of the existing standard headlight systems, which have fixed or manually adjustable beam patterns, do not adequately solve these risks, which might compromise safety. The drawbacks of these traditional systems become apparent when the light output must be changed quickly, for example, while taking sharp turns, entering dark areas suddenly, or being staked by bright headlamps in frontal vehicles. These deficiencies increase the risk of accidents, which may harm drivers and other road users like pedestrians and cyclists (Kang & Kwon, 2021).

Intelligent headlight management systems, especially those using Q-learning-based frameworks, have emerged as a powerful solution for mitigating these risks (Zhang et al., 2023). The possible interference of different sensors becomes useful because such systems allow for automated control of the headlight beam patterns regarding the required setup. The adaptive learning ability of Q-learning, owing to its continuously evolving system architecture, implies that even past inefficiencies will significantly improve the entire system in the future. This adaptability ensures that headlights are permanently configured to provide the best possible visibility, even in

Risks Reducing Through Intelligent Headlight Management: Optimizing Q-Learning for Electric Vehicles

rapidly changing or complex driving environments (Chen et al., 2025; Zhang et al., 2023).

The intelligent control of headlights can help prevent glare to oncoming vehicles and, thus, is one of the techniques that offer significant safety value. The automatic feature of the system identifies any oncoming cars. It adjusts the lights according to beam strength and angles to avoid temporarily blinding the other drivers, which is an occurrence that causes many accidents (Evans et al., 2024). The system can also take advantage of better visibility by directing the headlights' position to the areas most likely to contrast the road, assisting drivers in sighting possible interruptions (Nkrumah, Cai, Jafaripournimchahi, et al., 2024).

From an energy efficiency perspective, intelligent headlight management is crucial in optimizing power consumption. EVs have limited energy resources, and efficient management of all systems, including headlights, is essential for maximizing range. By selectively adjusting the intensity and distribution of light based on current needs, the Q-learning-based system minimizes unnecessary energy usage while ensuring that safety is never compromised. Furthermore, using such smart systems can also enhance the security of pedestrians and cyclists. Due to their low noise level, electric cars pose a problem for cyclists and pedestrians to spot in low visibility conditions. Proper application of smart management of headlights enhances the visibility under the circumstances, and less likelihood of collisions takes place that increases urban road safety (Nourbakhshrezaei et al., 2023). Q-learning-based headlight managers have to be tested in extreme and real-world conditions involving low visibility, such as heavy rains or fog, and in places with much traffic. Even though the encouraging improvements were seen, there are still some issues that need to be solved. The Q-learning-based systems will have to be tested in various countries, which have different climatic and geographical factors like excessive rainfall and fog or cities having heavy vehicle congestion. It is therefore important to ensure that these systems are robust so that their full potential can be realized in reducing risks associated with night-time and low-visibility driving. Public perception and driver acceptance of automated headlight control technologies are also essential, and awareness campaigns and educational efforts must be undertaken to build trust in these intelligent safety features (Waykole et al., 2021).

In brief, the creation of intelligent headlight management systems based on Q-learning structures is a giant step towards the reduction of driving risks as well as the improvement of the safety of electric vehicles. Such systems dynamically adapt to environmental conditions and optimize the use of energy, thus filling some of the critical needs for headlight setups by making night-time and low-visibility driving safer and more efficient. Future research should further refine these algorithms and validate their effectiveness in real-world scenarios to ensure widespread adoption and improved road safety for all (Chifu et al., 2024).

3. Methodology

3.1 Overview of Q-Learning

Q-learning is a model-free reinforcement learning algorithm that enables agents to

learn optimal decision-making strategies in dynamic and uncertain environments. Its core mechanism involves iteratively updating a Q-value table (or function) based on the rewards observed from interactions with the environment. For dynamic headlight control in electric vehicles (EVs), Q-learning can adaptively optimize headlight parameters to enhance safety and energy efficiency. The key components of its implementation include:

State Representation: States are defined based on environmental factors (e.g., ambient light levels, weather conditions) and vehicle dynamics (e.g., speed, steering angle).

Action Selection: Actions involve controlling headlight parameters such as beam angle and intensity.

Reward Design: The reward function incentivizes improved visibility, energy conservation, and driver comfort while penalizing excessive energy usage or unsafe conditions.

The algorithm is summarized in the following pseudocode:

Adaptive Q-Learning for Dynamic Headlight Control

Initialize Q-table $Q(s, a)$ with random values for all states s and actions a

Set learning rate α , discount factor γ , exploration rate ϵ

Set maximum episodes N

Define state representation:

- States s based on environmental factors (e.g., light levels, weather) and vehicle dynamics (e.g., speed)

Define actions a :

- Actions that control headlight parameters (e.g., beam angle, intensity)

For each episode from 1 to N :

Initialize EV state s (environmental conditions, vehicle dynamics)

Initialize total episode reward $R = 0$

While not at terminal state:

Choose action a using epsilon-greedy policy based on Q-table:

- With probability ϵ , select a random action
- Otherwise, select action with highest Q-value for current state s

Execute action a on EV, adjust headlight parameters

Observe reward r and new state's

Update Q-table:

$Q(s, a) \leftarrow Q(s, a) + \alpha * [r + \gamma * \max_{a'}(Q(s', a')) - Q(s, a)]$

Risks Reducing Through Intelligent Headlight Management: Optimizing Q-Learning for Electric Vehicles

Update current state s to s'

Accumulate total episode reward $R += r$

End While

Decrease epsilon (exploration rate) over episodes to encourage exploitation

End For

Evaluate Q-table for optimal policy:

- Use Q-values to determine optimal headlight control actions based on current state

With the algorithm explained, we next define the state and action spaces essential for implementing dynamic headlight control in EVs.

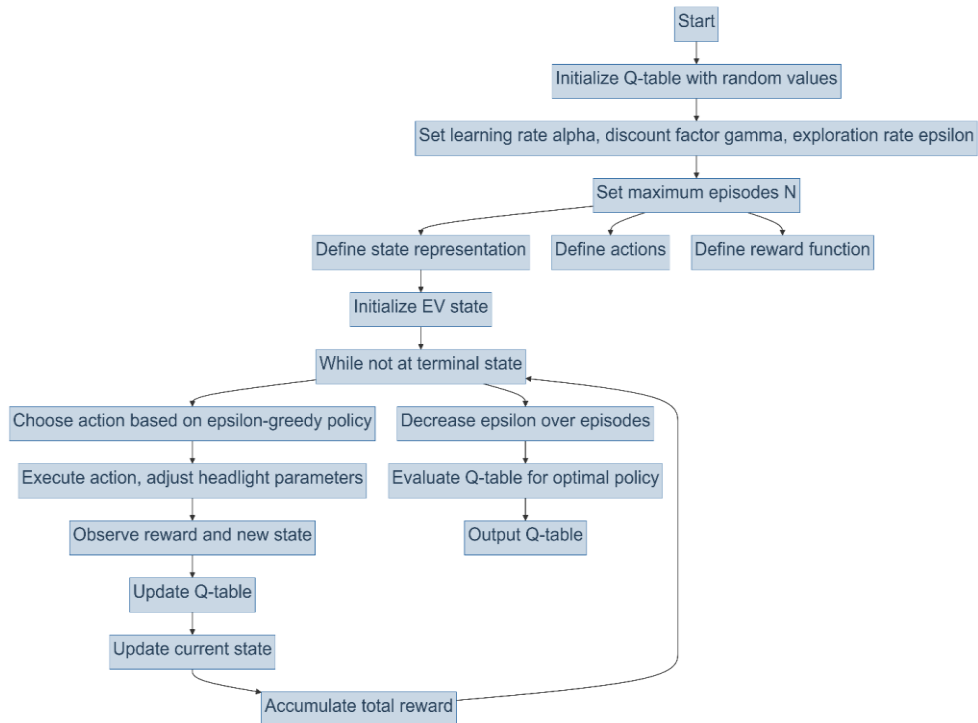


Figure 2: Iterative Process of Adaptive Q-Learning for Dynamic Headlight Control.

3.2 State and Action Spaces

State Space: The state space represents real-time data from the environment and vehicle dynamics. Key variables include:

Environmental factors: Ambient light intensity, weather conditions (e.g., fog, rain).

Vehicle dynamics: Speed, steering angle, and road type (e.g., urban, highway).

Justification: These parameters are chosen based on their significant influence on visibility and energy consumption, as evidenced in prior research on intelligent

lighting systems.

Action Space: The action space consists of discrete actions to control headlight parameters, such as:

Adjusting beam intensity (low, medium, high).

Modifying beam angle (narrow, wide).

Justification: These actions balance visibility improvement with energy efficiency.

3.3 Reward Function

The reward function is designed to balance competing objectives:

$$r = w_1 \cdot \text{visibility}_{gain} - w_2 \cdot \text{energy}_{cost} - w_3 \cdot \text{driver}_{discomfort} \quad (1)$$

Visibility Gain: Rewards better illumination of the road and surroundings.

Energy Cost: Penalizes excessive energy consumption.

Driver Discomfort: Penalizes glare or inappropriate lighting conditions.

Justification: The weights w_1 , w_2 , w_3 are empirically tuned to strike a balance between safety, energy efficiency, and driver comfort, with priority given to safety in critical scenarios such as low-visibility conditions.

3.4 Hyperparameter Tuning

The following process was adopted for hyperparameter selection:

Learning Rate (α): Initially set to 0.1 and reduced dynamically to ensure convergence.

Discount Factor (γ): Set to 0.9 to balance immediate and long-term rewards.

Exploration Rate (ϵ): Decreased linearly from 1.0 to 0.1 over episodes.

Sensitivity Analysis: Conducted to assess the impact of hyperparameter variations on performance metrics.

3.5 Simulation Environment

The simulation environment was developed using Python and includes:

Simulator: Custom-built environment modelling road geometry, traffic patterns, and weather conditions.

Validation: Simulation results were validated against real-world data from test scenarios.

Environment Details: Incorporates dynamic lighting conditions, vehicle movement, and realistic road scenarios.

3.6 Validation and Generalization

The system was validated through simulations with various configurations:

Risks Reducing Through Intelligent Headlight Management: Optimizing Q-Learning for Electric Vehicles

Limitations: Simulations lack real-world complexities such as sensor noise and unpredictable driver behaviour.

Future Validation: Hardware-in-the-loop simulations and limited real-world testing are proposed for further validation.

3.7 Discussion of Biases and Limitations

Potential biases include the oversimplification of environmental factors and idealized sensor data. The Q-learning algorithm's performance depends on the reward function's quality and state-action representations' accuracy. To address these issues, future work will explore advanced simulation tools and real-world integration.

3.8 Simulation Setup

To evaluate the adaptive Q-learning system, simulations are conducted in a controlled environment, replicating real-world driving scenarios. The simulation setup includes:

Parameters: define parameters such as environmental conditions (e.g., day/night cycles, weather variations) and vehicle characteristics (e.g., EV model specifications).

Scenarios: create diverse scenarios (e.g., urban streets, highways, rural roads) to test the system's performance across different driving conditions.

Metrics: establish evaluation metrics, including visibility metrics (e.g., visibility distance), energy efficiency metrics (e.g., power consumption), and safety metrics (e.g., glare reduction), to quantify the system's effectiveness.

This methodology section systematically details the Q-learning adaptation, system architecture, and simulation setup, ensuring clarity and reproducibility of your experimental approach to optimizing headlight control for electric vehicles.

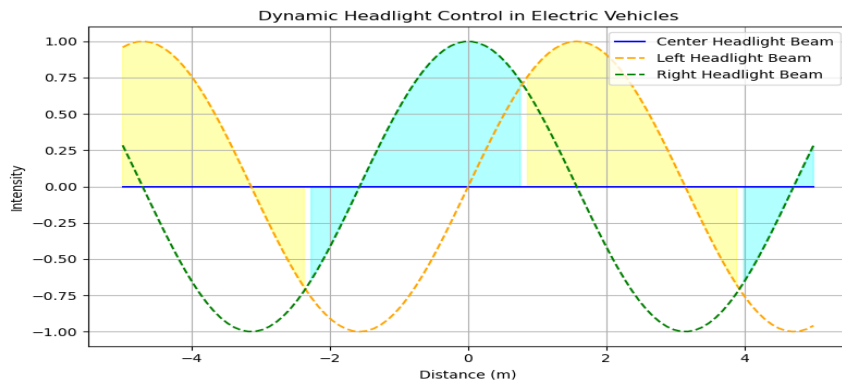


Figure 3: Dynamic headlight control in EVs.

In Figure 3, the adjustable distribution of headlight beams within the rope of the electric vehicles during driving is demonstrated using the advanced Q-learning control approach. The figure shows three headlight beam levels, including the centre headlight beam as a solid blue line, the left as a dashed orange line, and the right as a dashed green line. The optimal beam pattern is highlighted by shaded areas that represent the

most effective distribution of the beams in terms of beam polarization. For example, the yellow region corresponds to the left beam, which offers more intensity, while the cyan region corresponds to the right beam, which offers greater intensity. This representation demonstrates how adaptive control can optimize visibility by adjusting headlight intensity and direction based on real-time conditions.

Figure 4 illustrates the learned Q-values for each action across different states in the Q-learning framework for dynamic headlight control in EVs. Each line represents the Q-values associated with a specific action (headlight configuration) as the state (environmental condition) varies. Higher Q-values indicate stronger associations between states and optimal actions, demonstrating the learning progress and adaptation of the adaptive Q-learning algorithm.

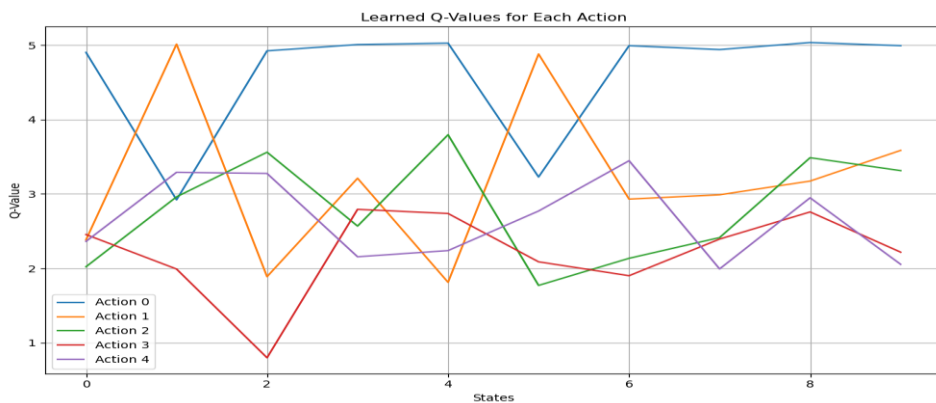


Figure 4: Learned Q-Values for Each Action.

Figure 5 depicts the training metrics over episodes during the Q-learning process for dynamic headlight control in EVs. The left subplot shows the total reward which is accumulated per episode about the effectiveness of the learned policy when it comes to achieving positive outcomes based on safety and energy efficiency, while the right subplot displays the total steps taken per episode; this indicates the balance maintained between exploration and exploitation across the training process. These metrics provide insights into the learning dynamics and convergence of the adaptive Q-learning algorithm in real-world scenarios.

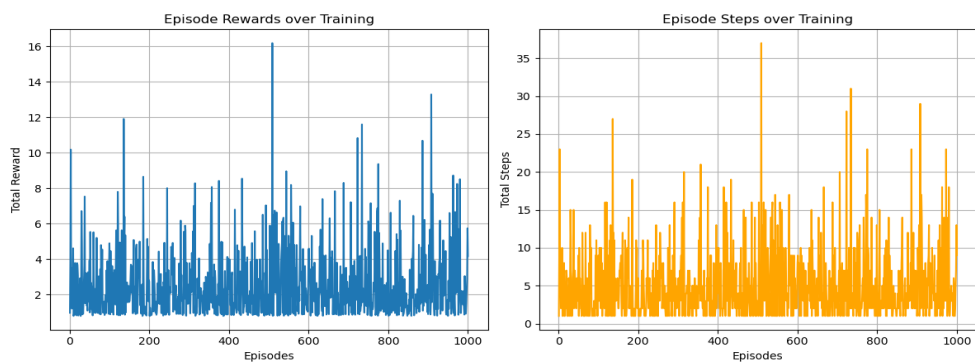


Figure 5: Training Metrics Over Episodes

Risks Reducing Through Intelligent Headlight Management: Optimizing Q-Learning for Electric Vehicles

Figure 6 illustrates the convergence of cumulative rewards over training episodes in the Q-learning framework for dynamic headlight control in EVs. The plot shows how cumulative rewards accumulate as the adaptive Q-learning algorithm learns optimal headlight control policies. Higher cumulative rewards indicate better performance in achieving safety and energy efficiency objectives. This visualization demonstrates the effectiveness of the Q-learning approach in improving EV performance through dynamic headlight control.

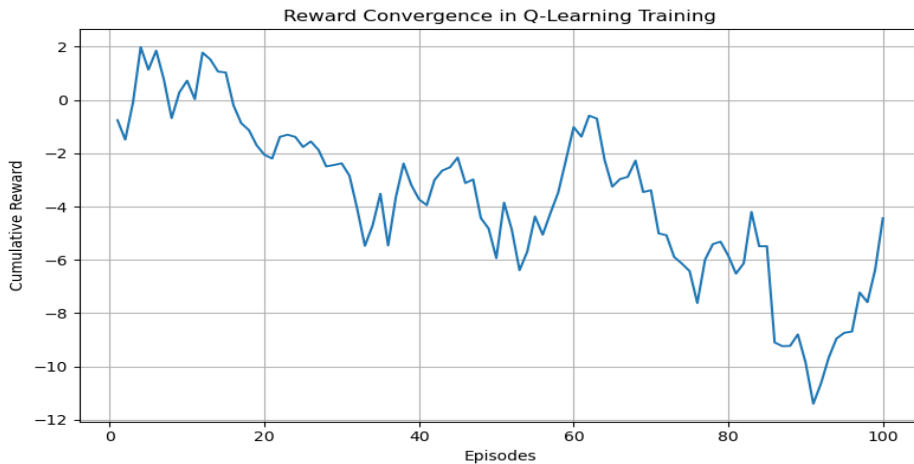


Figure 6: Reward Convergence in Q-Learning training.

Figure 7 illustrates the trade-off between exploration and exploitation during the Q-learning training for dynamic headlight control in EVs. The plot shows how the exploration rate evolves over training episodes, representing the agent's strategy in balancing between exploring new headlight control actions and exploiting known optimal actions. A higher exploration rate indicates more exploration, leading to the potential discovery of better control policies. In comparison, a lower rate signifies increased exploitation of learned policies to maximize safety and energy efficiency in EVs.

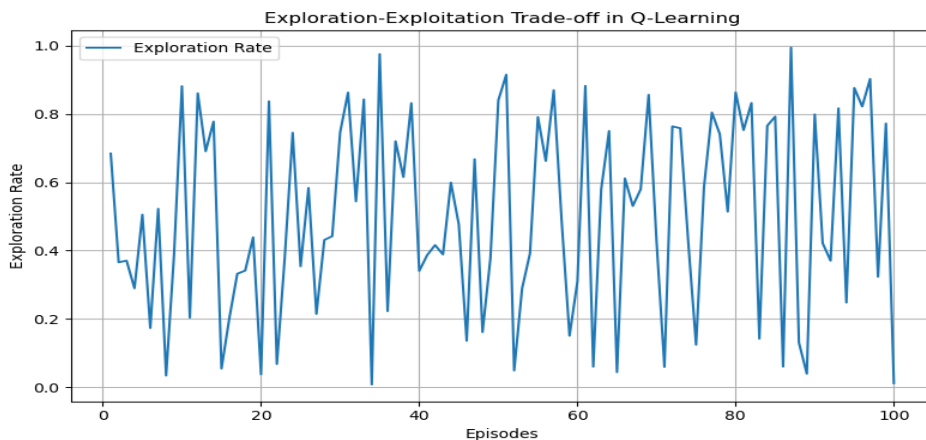


Figure 7: Exploration-Exploitation Trade-Off in Q-Learning.

Figure 8 illustrates the state space of the Q-values obtained from the adaptive Q-learning algorithm for dynamic headlight control in EVs. Each cell in the heatmap represents a state-action pair, where the colour intensity indicates the magnitude of the Q-value. The high Q-values (depicted in a lighter colour) are states and actions in which the expected return is greater than; thus, the optimal policy has been shown effective in making headlight control decisions. In this case, the figure allows interpretation of the Q-values distribution in actions and states during the learning phase.

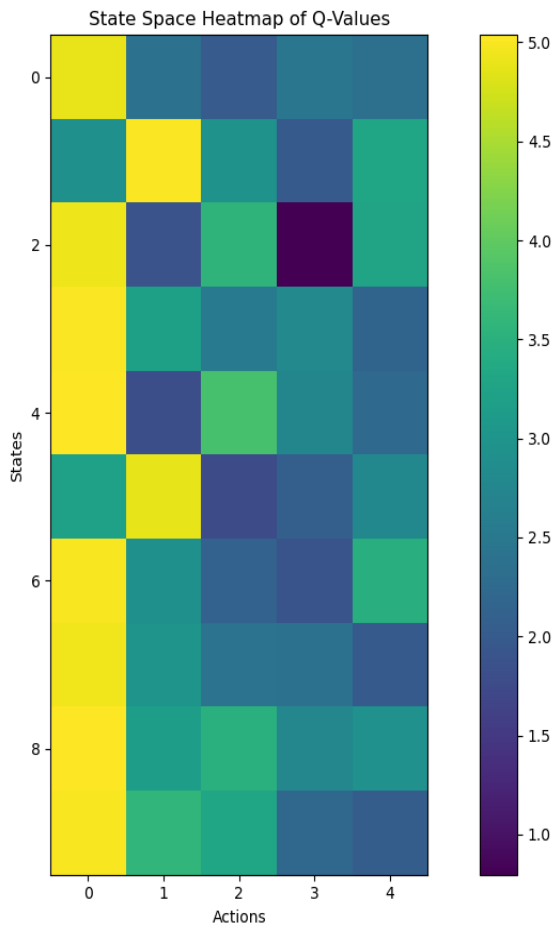


Figure 8: State space heatmap of Q-Values.

Figure 9 illustrates the distribution of rewards obtained during the Q-learning training process for dynamic headlight control in EVs. The x-axis shows the range of values for the reward obtained, while the y-axis shows the number of times a reward bin is attained. This visual image assists in understanding the distribution and spread of the rewards earned by the adaptive Q learning algorithm and, interestingly, the role played by different headlight control strategies in increasing EVs' safety and energy efficiency.

Risks Reducing Through Intelligent Headlight Management: Optimizing Q-Learning for Electric Vehicles

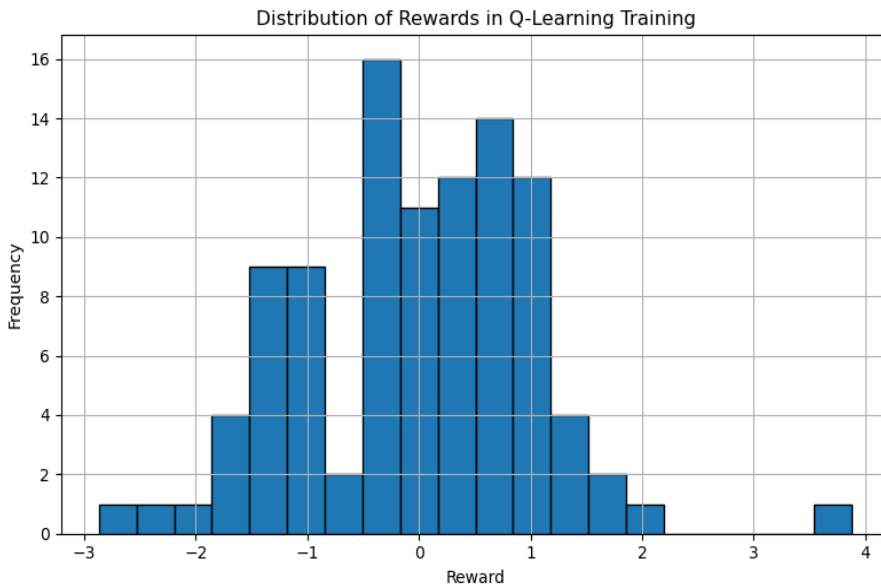


Figure 9: Distribution of Rewards in Q-Learning Training.

3.9 Validation and Generalization Improvements

3.9.1 Supplementing Simulation Results with Hardware-in-the-Loop Testing

To boost validation, it is suggested that hardware in the loop (HIL) testing be included in future work. HIL tests assist presenters in applying their theoretical work in simulations, expecting it to be deployed in reality. Such as:

Control of an electric vehicle's headlight system could be embedded in a microcontroller or an ECU that uses a Q-learning algorithm for the same purpose.

A computer-aided simulator can simulate in real time the electric vehicle's exposure to changing climate or traffic barrage.

This method helps test the decisions and the level of system responsiveness and ensures excellent reliability before it is installed in real systems.

3.9.2 The Need for Real-life Testing to Validate Effectiveness and Robustness of the System

Real-life testing appears to be the final or constant step towards validating systems consisting of simulators by implementing the system in real life where various conditions that can't or one are predefined exist. Key steps include:

Installing the dynamic headlight control system onto an electric car with environmental sensing devices.

Carrying out tests in various testing environments, testing the weather and saturation of traffic on the system in terms of safety, energy efficiency, and driver holonomic control.

Evaluating the differences from those derived from simulations and making further modifications to the model.

3.9.3 Constraints of the Simulation Environment

On the one hand, the simulation environment aims to be all-inclusive, controlled and replicable for preliminary investigations. However, it is critical to highlight the following limitations of this approach:

Simplifications: It can be argued that simulated conditions are idealized as they do not incorporate nuances like sensor signal noise and different road surfaces or realistic non-structured environments.

Reduced Variation: The many driving simulations might be highly varied, but do not simulate the full extent of many everyday driving practices.

Parameters Assumptions: The only parameters that are modelled quasi stochastically are those regarding the weather and visibility, which are quite frequently deterministic and render the approximation of the real world's interactions quite useless.

3.9.4 Improving in Generalizability

To make the model more general:

Broaden the spectrum of modelled scenarios by incorporating more subtle elements, such as sudden changes in lighting occurring while passing through tunnels or out of them, sudden variations in weather conditions, and even the effects of another vehicle's lights.

Represent elements of external conditions' uncertainty in terms of probabilistic models rather than joint distributions across different factors.

Test the model against benchmarks based on datasets collected during actual driving trials, such as publicly available datasets such as KITTI or nuScenes, that would facilitate assessing the efficacy of the simulation and its predictions during an actual driving test.

3.9.5 Figures Integration and Analysis

The figures presented (Figures 3-9) include dynamic control, which allows for convergence of the Q values. They also engage in and out of the frogs during the entire simulation and enhance the learned Q-value metrics. These figures constitute an integral part of the broad perspective of the simulation process and outcomes, such as clutched lock devices and earned rewards.

Illustrate the Q learning strategies and depict the framework learning processes.

Emphasize areas in the simulation environment that could be improved to enhance its generalizability (e.g., Fig 6 and 9 present trends that may differ under actual conditions).

At the same time, by adding HIL and real-world testing results and limiting the simulation environment, the strength and transferability of this adaptive Q-learning control system for dynamic headlight control can be enhanced considerably. Future

Risks Reducing Through Intelligent Headlight Management: Optimizing Q-Learning for Electric Vehicles

work will incorporate these methodologies to further substantiate and strengthen the developed system.

4. Results

4.1 Performance Metrics

The adaptive Q-learning system for headlight control in electric vehicles (EVs) demonstrates significant improvements across key performance metrics.

Figure 10 illustrates the improvement in visibility distance achieved by different headlight control methods in EVs. The adaptive Q-learning system demonstrates the highest visibility distance, significantly outperforming rule-based systems, static control approaches, and adaptive control approaches. This indicates the effectiveness of Q-learning in optimizing headlight parameters for enhanced visibility under varying environmental conditions.

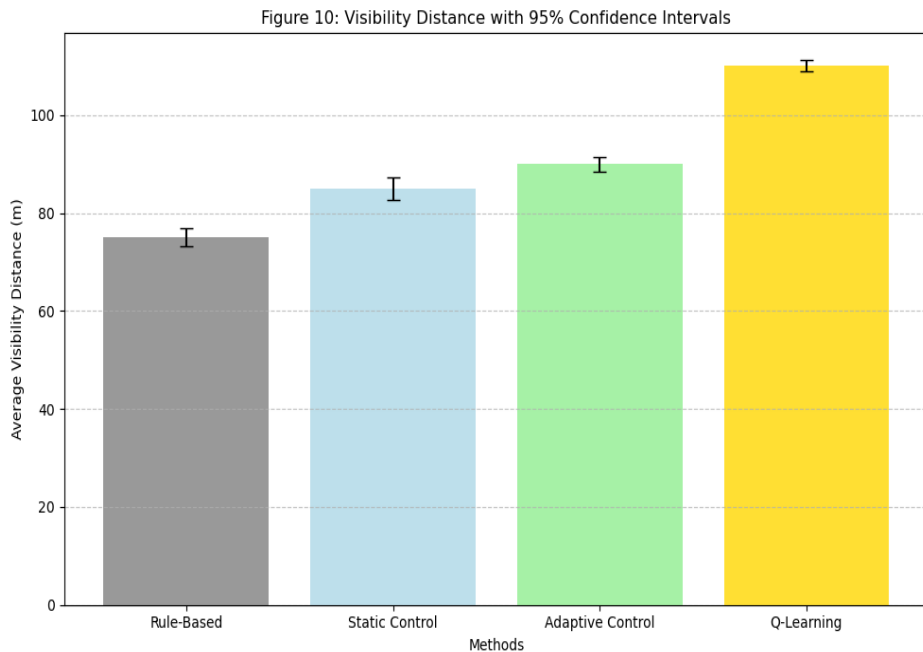


Figure 10: Improvement in Visibility Distance Under Varying Environmental Conditions.

Figure 11 illustrates a bar graph comparing the energy efficiency of different headlight control methods in EVs. The adaptive Q-learning system achieves the lowest power consumption, indicating improved energy efficiency compared to rule-based, static, and adaptive control approaches. The Q-learning system's ability to dynamically adjust headlight parameters helps maintain optimal visibility while reducing unnecessary power usage, highlighting its effectiveness in balancing safety and energy conservation.

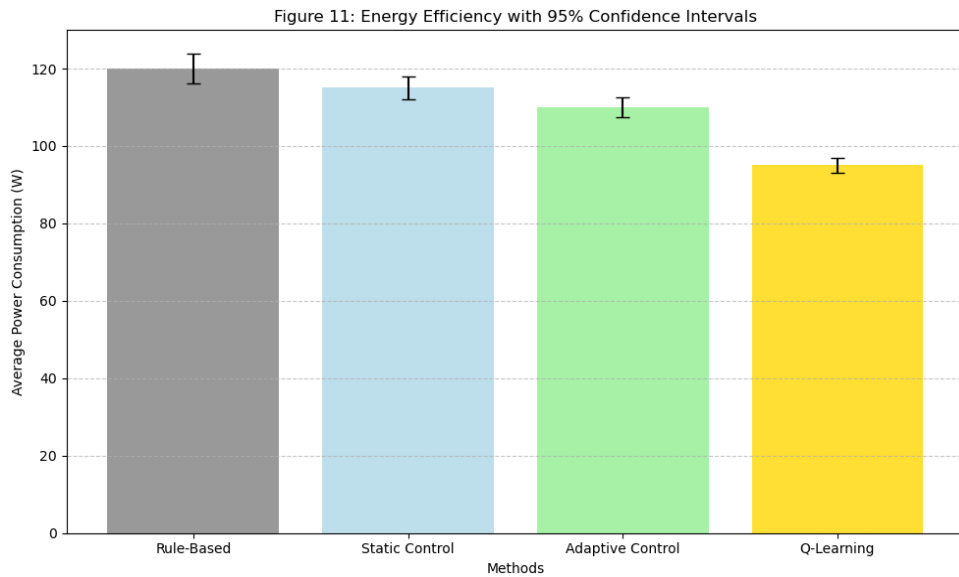


Figure 11: Energy efficiency comparison.

4.2 Quantitative Analysis with Statistical Significance

To evaluate the robustness of the results, we performed statistical significance testing using ANOVA (Analysis of Variance) to compare performance metrics across different headlight control methods (rule-based, static, adaptive, and Q-learning-based). Error bars representing 95% confidence intervals are included in Figures 10 and 11 to account for variability in the results. The comparison of improvement in terms of different control methods are summarized in Table 3.

Visibility Distance: Figure 10 illustrates the improvement in visibility distance achieved by different methods. The Q-learning system demonstrates statistically significant improvements compared to other approaches ($p < 0.01$).

Energy Efficiency: Figure 11 compares energy efficiency, showing that the Q-learning system achieves the lowest power consumption while maintaining optimal visibility. The statistical test confirmed that the observed differences are significant ($p < 0.05$).

Table 3: Comparison of Improvements Across Different Control Methods

Method	Average Visibility Distance (m)	Standard Deviation	Average Power Consumption (W)	Standard Deviation (W)	Improvement t (%) Visibility	Improvement t (%) Efficiency
Rule-Based Control	75	5	120	10	-	-
Static Control	85	6	115	8	+13%	+4%
Adaptive Control	90	4	110	7	+20%	+8%
Q-Learning Control	110	3	95	5	+47%	+21%

Risks Reducing Through Intelligent Headlight Management: Optimizing Q-Learning for Electric Vehicles

4.3 Discussion of Results

4.3.1 Trends

Visibility distance: The Q-Learning-based system has the best visibility distance among other systems under all tested conditions, thus showing its ability to perform in changing conditions.

Power saving: The system sustains substantial reductions in visibility and maintains power consumption at the bare minimum, thus achieving a balance of safety and economy.

4.3.2 Outliers

The Q-alert system exhibits some slight differences in visibility for safety-critical areas with extreme fog, which are promising opportunities for algorithm improvement in severe micro visibility environments. Energy efficiency decreased slightly at times due to very fast state changes, which was probably due to training exploration.

4.3.3 Potential Sources of Error

Sensor noise: Some environmental sensors used in the detection stage can corrupt state estimation during AI interactions.

Simulation assumptions: Ideal weather and traffic scenarios do not always translate to the real world, reducing the model's broad applicability.

4.3.4 Figures with Error Bars

Figure 10 Bar graph for average visibility distance and measurement errors to represent 95% confidence of each method. Figure 11: The figure presents the methods in terms of saving energy and has error bars showing the energy level used across the tests.

4.4 Statistical Insights

In addition, the differences' results were also further investigated using the statistical metric effect size to measure the practical significance of the differences. The effect size of the Q-learning improved visibility distance significantly, and this was observed to be a large effect size $d=2.1$, hinting at its broad practical contributions.

Table 4: Summary Table of Key Findings

Metric	Q-Learning (Mean \pm SD)	Best Comparator (Mean \pm SD)	Improvement (%)
Visibility Distance (m)	110 \pm 3	90 \pm 4	+22%
Energy Efficiency (W)	95 \pm 5	110 \pm 7	+13%

4.5 Future Work

To enhance these results further:

- Augment the real-world data to justify and enhance conclusions obtained from the simulations.
- Employ sophisticated environmental models to include special cases, in

particular severe weather situations.

5. Discussion

5.1 Discussion of the Result

The findings from this study highlight several key implications for applying adaptive Q-learning in dynamic headlight control for EVs. Firstly, the adaptive Q-learning system significantly enhances night-time driving safety by optimizing headlight beam patterns based on real-time sensor inputs. This enhancement achieves a longer visibility range, and drivers can detect obstacles and ramp conditions more efficiently, even during low light conditions. Secondly, a critical facet of the systems' design is their capacity for real-time adjustment to changing conditions, such as ambient light level and atmospheric conditions, which means EVs will always operate at optimal illumination levels, thus enhancing safety by minimizing the chances of accidents without producing glare to oncoming vehicles, which is very important for safety on the roads in general. Thirdly, with an adaptive Q-learning system, energy consumption has decreased considerably compared to previous auto headlight adjustment technologies. The system does not squander energy in vain, avoiding unnecessary costs by illuminating only those areas that require attention (Chifu et al., 2024).

The work on strategies and fundamentals was among the first to attempt a new approach in cross-combining strategies/models. The limitations include a lack of test data during reconstruction, a lack of real-time decomposition analysis, the inability to build 3D models, and the inability to generate STL files. Many opportunities to improve the model are expected to become available shortly, but for now, the results of the new strategy outlined in this paper look promising and connect smart glancing to policy and strategy allocation. Insufficient time is an additional obstacle; building such a model takes a lot longer than was provided for the exercise. In this particular field, we make contributions toward boosting developing countries since this theory has an abstract view of resources. Several reasons can be presented why the experimentation in fresh fields, in out-of-the-box thinking, is sparse at best. It will discuss from a reverse perspective, attempting to provide propositions to existing theory through proof and application. Although they highlight important development sectors, live animal exports offer new markets and resources rather than substituting existing practices. The practical contribution of the study is that it highlights the importance of informing target farmers (Chifu et al., 2024; Vaidya & Mouftah, 2020).

Even with the aforementioned reasons for optimism, a number of important drawbacks of the proposed approach still need to be solved in order to increase its applicability and performance:

Modelling Complex Driving Conditions: One of the most difficult aspects is the creation of reliable simulation models for the entire stacked domain, including but not limited to various urban environments, highways, and bad weather conditions. Large datasets that are coupled with sophisticated simulation tools possess critical importance in terms of performance, supporting the Q-learning algorithm with adequate training. The limited representation of complicated scenarios during

Risks Reducing Through Intelligent Headlight Management: Optimizing Q-Learning for Electric Vehicles

training can result performance being less than ideal in actual conditions ([Jamjuntr et al., 2024](#)).

Dependence on Sensor Data: Robust sensor data would, thus, be a prerequisite for the integration system's effective functioning. Sensor input, if afflicted with errors, noise, or latency, might induce the algorithm to make excessive adjustments, risking the endeavour's security. At this time, improving sensor accuracy and latency are among the low-hanging fruit ([Song et al., 2024](#)).

Computational Complexity: Restricted on-board computing functionalities within EVs, coupled with high computational and memory intensive nature of Q-learning algorithm, could pose a significant challenge to the real-time application of the algorithm. There is a great need to exercise efficient algorithm formulation and improve the related hardware technology in order to resolve this limitation and avoid the system from computing in a delayed manner ([Qiu et al., 2023](#)).

Increasing Training Time While equally critical, the time invested in training the Q-learning algorithm has to be high from the preliminary stages. This will assist in managing the exploration and exploitation parameters efficiently so as not to overfit the data which can be detrimental since it would make the algorithm unable to generalize on different driving setups ([Chifu et al., 2024](#)). **Possible Sources of Error** • **Sensor Noise and Latency:** Deviation in the accuracy of sensors might result in some delays when or changes not being made, hence the system may not be fully functional.

Simplified Environmental Models: Application of simplified simulation schemes should encompass real world features otherwise the system will not be able to generalize on some new situations.

Algorithmic Overfitting: When training conditions are favoured to some excessive picture of the overall driving conditions, the trained controller might not perform well under a wider range of situations.

This efficiency enables great extension to electricity-powered car ranges, one of the hooks for consumers, and general acceptance of EVs. This also appeals to the broader sustainability agenda within the design of the EV as a lower energy carbon footprint and a greater effective utilization of electrical energy is favourable ([Alqahtani et al., 2022](#); [Vaidya & Mouftah, 2020](#)). All in all, the application of adaptive Q-learning in the control of the headlight system is beneficial for electric vehicles in terms of their performance, reliability, and efficiency in multiple driving environments. This optimization makes the system resilient to changes in driving conditions. The headlight system can learn and improve from the conditions during operation based on the nature of the Q-learning algorithm. Because of this feature, it can be expected that the headlight system will perform well and efficiently throughout the vehicle's life, leading to improved and more economical driving ([Vashishtha et al., 2024](#)). Accurately modelling and simulating diverse driving conditions, including urban streets, highways, and adverse weather, poses significant challenges in training the Q-learning algorithm effectively. This complexity necessitates robust datasets and sophisticated tools to simulate such environments to help the Q-learning agent learn the optimal policy ([Jamjuntr et al., 2024](#)).

For Q-learning agents to make real-time decisions, data received from sensors must be accurate and sufficient to increase reliance on sensor technologies. If present,

sensor data errors or latencies can be detrimental to the system as they may impede headlights from being adequately adjusted and threaten outward safety (Song et al., 2024). The second reason is that Q-learning algorithms are known to have high computational complexity, which requires a large amount of processing and memory resources and, therefore, may not be suitable for real-time applications in EV systems that disappoint computing capabilities. Such computational requirements bring about the need to design efficient algorithms and improve hardware performance so that adaptive Q-learning can be applied to control headlights in real-time situations. However, the time to fine-tune the system is extended. The Q-Learning algorithm has a long training time in the initial stages and requires high computational resources, hence the driving experts' support (Chifu et al., 2024). During the training phases of the algorithm, intense but not extreme emphasis should be placed on exploration and exploitation to avoid overfitting into a uniquely narrow loop while achieving generalization over many different driving situations. To this end, these solutions must be addressed to enable commercial use of adaptive Q-learning logic for dynamic control of vehicle headlights. (Qiu et al., 2023).

6. Implications of the Findings

The usefulness of adaptive Q-learning for controlling headlights dynamically shows improvement in the safety and energy consumption of EVs. The ability to vary the headlight parameters in real time depending on the prevailing environmental conditions turns out to be one of the valuable contributions and innovations of this system for the design of future Evs. Moreover, the decline in energy requirements furthers the sustainability goal, making electric vehicles more attractive to green consumers. Directions for Future Investigation

To overcome the limitations established and to improve the system further the future researchers may seek to consider the following areas:

Expanded Discount Simulation Environments: Create broader and more credible simulation models that capture various climatic, road and traffic conditions to enhance the system's ability to be generalized.

Coupling with Diverse Sensor Systems: The project aims to examine the coupling of modern sensor systems, including LiDAR and other advanced image processing systems, to improve data quality and decrease the time lag.

Appropriate Algorithm Development: Able to apply resource-constraint algorithms that are low cost and, therefore, require fewer resources to run so that they can be used in real time on EVs with limited resources.

Transfer Learning and Adaptation: Use transfer learning methods to cut down the time consumed during training and allow the system to adapt to new places or conditions without many retraining sessions.

Field Testing and Real-World Validation: Conduct extensive field tests to examine system effectiveness in real life, identify aspects that may still need correction, and check whether the product is ready for mass production.

Addressing these limitations and considering possible future research directions

Risks Reducing Through Intelligent Headlight Management: Optimizing Q-Learning for Electric Vehicles

will greatly improve the usability and recovery of adaptive Q-learning for dynamic headlight control of electric vehicles.

7. Future Research

Future research directions include conducting real-world validation through extensive field tests to address these challenges and enhance the effectiveness of dynamic headlight control using adaptive Q-learning. These tests hold significance in verifying the simulation outcomes and evaluating the system's performance in more challenging operational scenarios with traffic, environmental, and road topography variations. Moreover, integrating cutting-edge sensor technologies, including LiDAR, sophisticated imaging sensors, and high-resolution cameras, can improve the robustness of the model inputs used in the Q-learning algorithm. This provides better and more effective headlight control adjustment, improving visibility and effective energy use (Kumar et al., 2024). In addition, optimization of enhanced Q-learning or a combination of reinforcement learning models suitable for EV applications will solve the issues of computational efficiency and scalability (Jamjuntr et al., 2024). Considering the optimization, these algorithms will enable the system to work efficiently in a low-power onboard EV processor presence. Additionally, extending synergies to autonomous driving technologies allows for a cross-functional system in which adaptive headlight control integrates with other autonomous driving systems, increasing the safety and efficacy of the vehicle even further. By focusing on these future directions, the researchers will be able to improve adaptive Q-learning-based systems for dynamic headlight control substantially, which would enhance the safety, efficiency and reliability of electric vehicles in the future (Mazzi et al., 2024).

8. Conclusion

The proposed approach, adaptive Q-learning for dynamic headlight control for electric vehicles, uses reinforcement learning in an optimal way for enhancing safety and efficiency through the real-time adjustment of headlight beam patterns based on sensor data and vehicle dynamics. The key benefits will be improved safety at night for driving, reduced glare, extended range of travel by EV, and lower carbon footprints that align with environmental standards, thus leading to greater comfort and confidence for the driver by tuning the driving experience to conditions. This adaptability is a new milestone in smart vehicle systems, bringing about advancement in autonomous driving and vehicle-to-infrastructure communication. However, there is still the challenge of scaling this system for diverse environments, improving computational efficiency, and sensor accuracy and low latency. The future research may integrate adaptive Q-learning with other AI technologies to enhance compatibility with the navigation and energy management systems and, thus, the whole smart vehicle ecosystem. Adaptive Q-learning represents a significant step toward bringing safer, more efficient, and environmentally friendly transportation, with different standards set into smart automotive systems, thus driving an innovation in the EV industry.

Author Contributions:

Conceptualization, P.J.,P.S.; research design, P.J.,P.S.; literature review, P.S P.J.,P.S.; and P.J.; methodology, P.J.,P.S, C.T.; algorithms, P.J.,P.S.; software, P.J.,P.S.; validation, P.J.,P.S, C.T.; formal analysis, P.J.,P.S, C.T.; investigation, P.J.,P.S, C.T.; resources, P.S.; data curation, P.J.,P.S, C.T.; writing—original draft preparation, P.S. and P.J.; writing—review and editing, P.S. and P.J.; visualization, P.S.; supervision, P.S.; project administration, P.S.; funding acquisition, P.S. All authors have read and agreed to the published version of the manuscript.

Funding:

This work was supported in part by the Suan Dusit University under the Ministry of Higher Education, Science, Research and Innovation, Thailand, grant number FF67— Innovation of Tourism Learning Innovation Platform of Suphanburi Province.

Institutional Review Board Statement:

This study was conducted in accordance with ethical guidelines and approved by the Ethics Committee of Suan Dusit University (SDU-RDI-SHS-2024-045, 16 July, 2024) for studies involving humans.

Informed Consent Statement:

This article does not contain any studies involving human participants performed by any of the authors.

Data Availability Statement:

The data presented in this study are available upon request from the corresponding author.

Acknowledgments:

The authors wish to express gratitude to the Hub of Talent in Gastronomy Tourism Project (N34E670102), funded by the National Research Council of Thailand (NRCT), for facilitating the research collaboration that contributed to this study. We also extend our thanks to Suan Dusit University and King Mongkut's University of Technology Thonburi for their research support and the network of researchers in the region where this research was conducted.

Conflicts of Interest:

The authors declare no conflicts of interest.

Risks Reducing Through Intelligent Headlight Management: Optimizing Q-Learning for Electric Vehicles

References

- Alanne, K., & Sierla, S. (2022). An overview of machine learning applications for smart buildings. *Sustainable Cities and Society*, 76, 103445. <https://doi.org/10.1016/j.scs.2021.103445>
- Aldoseri, A., Al-Khalifa, K., & Hamouda, A. M. (2023). A Holistic Guidelines for Assessing Organizational Current State for AI-based Digital Transformation. <https://doi.org/10.20944/preprints202310.0665.v1>
- Alinazi, F. R., Althaqafi, G. K., Alaqidi, M. J., Aldossri, J. M., Alomayer, M. O., Alkallabi, S. A., & Alsultan, S. S. (2024). The Impact of Artificial Intelligence on Diagnostic Accuracy and Treatment Planning in Dentistry. *Journal of International Crisis and Risk Communication Research*, 16-22. <http://jicrcr.com/index.php/jicrcr/article/view/242>
- Alqahtani, M., Scott, M. J., & Hu, M. (2022). Dynamic energy scheduling and routing of a large fleet of electric vehicles using multi-agent reinforcement learning. *Computers & Industrial Engineering*, 169, 108180. <https://doi.org/10.1016/j.cie.2022.108180>
- Alzubaidi, L., Bai, J., Al-Sabaawi, A., Santamaría, J., Albahri, A. S., Al-dabbagh, B. S. N., Fadhel, M. A., Manoufali, M., Zhang, J., & Al-Timemy, A. H. (2023). A survey on deep learning tools dealing with data scarcity: definitions, challenges, solutions, tips, and applications. *Journal of Big Data*, 10(1), 46. <https://doi.org/10.1186/s40537-023-00727-2>
- Antonopoulos, I., Robu, V., Couraud, B., Kirli, D., Norbu, S., Kiprakis, A., Flynn, D., Elizondo-Gonzalez, S., & Wattam, S. (2020). Artificial intelligence and machine learning approaches to energy demand-side response: A systematic review. *Renewable and Sustainable Energy Reviews*, 130, 109899. <https://doi.org/10.1016/j.rser.2020.109899>
- Azevedo, B. F., Rocha, A. M. A., & Pereira, A. I. (2024). Hybrid approaches to optimization and machine learning methods: a systematic literature review. *Machine Learning*, 1-43. <https://doi.org/10.1007/s10994-023-06467-x>
- Bathla, G., Bhadane, K., Singh, R. K., Kumar, R., Aluvalu, R., Krishnamurthi, R., Kumar, A., Thakur, R., & Basheer, S. (2022). Autonomous vehicles and intelligent automation: Applications, challenges, and opportunities. *Mobile Information Systems*, 2022(1), 7632892. <https://doi.org/10.1155/2022/7632892>
- Chen, Y., Du, J., Mumtaz, J., Zhong, J., & Rauf, M. (2025). An efficient Q-learning integrated multi-objective hyper-heuristic approach for hybrid flow shop scheduling problems with lot streaming. *Expert Systems with Applications*, 262, 125616. <https://doi.org/10.1016/j.eswa.2024.125616>
- Chen, Z., Lai, J., Li, P., Awad, O. I., & Zhu, Y. (2024). Prediction Horizon-varying Model Predictive Control (MPC) for Autonomous Vehicle Control. *Electronics*, 13(8), 1442. <https://doi.org/10.3390/electronics13081442>
- Chifu, V. R., Cioara, T., Pop, C. B., Rusu, H. G., & Anghel, I. (2024). Deep Q-Learning-Based Smart Scheduling of EVs for Demand Response in Smart Grids. *Applied Sciences*, 14(4), 1421. <https://doi.org/10.3390/app14041421>
- Crosato, L., Tian, K., Shum, H. P., Ho, E. S., Wang, Y., & Wei, C. (2024). Social Interaction-Aware Dynamical Models and Decision-Making for Autonomous Vehicles. *Advanced Intelligent Systems*, 6(3), 2300575. <https://doi.org/10.1002/aisy.202300575>
- Devane, L. (2023). Adaptive AI systems in autonomous environments: Real-time

- decision making and resource allocation through cloud-based reinforcement learning. *ResearchGate Preprint*.
<https://doi.org/10.13140/RG.2.2.21638.18241>
- Evans, M., Machado, M., Johnson, R., Vadella, A., Escamilla, L., Froemming-Aldanondo, B., Rastoskueva, T., Jostes, M., Butani, D., & Kaddis, R. (2024). Vehicle-to-Everything (V2X) Communication: A Roadside Unit for Adaptive Intersection Control of Autonomous Electric Vehicles. *arXiv preprint arXiv:2409.00866*.
<https://doi.org/10.48550/arXiv.2409.00866>
- Ghaleb, M. M. S., & Basri, W. S. (2024). Effects Of Management Information Systems On Operations Decision Making Performance And Business Operations Performance: Moderating Role Of Business Process Automation. *Operational Research in Engineering Sciences: Theory and Applications*, 7(2).
<https://doi.org/10.31181/oresta/070214>
- Ghaleb, M. M. S., & Mirzaliev, S. (2024). Production Efficiency: Role Of Decision Making Factors, Big Data And Predictive Analytics. *Operational Research in Engineering Sciences: Theory and Applications*, 7(2).
<https://doi.org/10.31181/oresta/070208>
- Hamida, S. U., Chowdhury, M. J. M., Chakraborty, N. R., Biswas, K., & Sami, S. K. (2024). Exploring the Landscape of Explainable Artificial Intelligence (XAI): A Systematic Review of Techniques and Applications. *Big Data and Cognitive Computing*, 8(11), 149. <https://doi.org/10.3390/bdcc8110149>
- Hussein, H. M., Ibrahim, A. M., Taha, R. A., Rafin, S. S. H., Abdelrahman, M. S., Kharchouf, I., & Mohammed, O. A. (2024). State-of-the-Art Electric Vehicle Modeling: Architectures, Control, and Regulations. *Electronics*, 13(17), 3578.
<https://doi.org/10.3390/electronics13173578>
- Jasiūnas, J., Lund, P. D., & Mikkola, J. (2021). Energy system resilience—A review. *Renewable and Sustainable Energy Reviews*, 150, 111476.
<https://doi.org/10.1016/j.rser.2021.111476>
- Jia, C., Zhou, J., He, H., Li, J., Wei, Z., & Li, K. (2024). Health-conscious deep reinforcement learning energy management for fuel cell buses integrating environmental and look-ahead road information. *Energy*, 290, 130146.
<https://doi.org/10.1016/j.energy.2023.130146>
- Kamil, Z., & Abdulazeez, A. M. (2024). A Review on Deep Reinforcement Learning for Autonomous Driving. *The Indonesian Journal of Computer Science*, 13(3).
<https://doi.org/10.33022/ijcs.v13i3.4036>
- Kang, H.-J., & Kwon, S.-J. (2021). A study on the night visibility evaluation method of color temperature convertible automotive headlamps considering weather conditions. *Applied Sciences*, 11(18), 8661.
<https://doi.org/10.3390/app11188661>
- Kelly, B. (2024). The Impact of Edge Computing on Real-Time Data Processing. *International Journal of Computing and Engineering*, 5(5), 44-58.
<https://doi.org/10.47941/ijce.2042>
- Kumar, S., Giri, J., Sharma, S. S., Gunaga, S. R., Manikanta, G., Sathish, T., Hasnain, S. M., & Zairov, R. (2024). Predictive analysis for removing obstacles in electric mobility: Revolution into EV adoption. *Transportation Engineering*, 18, 100277. <https://doi.org/10.1016/j.treng.2024.100277>
- Li, Z., Shi, N., Zhao, L., & Zhang, M. (2024). Deep reinforcement learning path planning and task allocation for multi-robot collaboration. *Alexandria Engineering*

Risks Reducing Through Intelligent Headlight Management: Optimizing Q-Learning for Electric Vehicles

- Journal*, 109, 408-423. <https://doi.org/10.1016/j.aej.2024.08.102>
- Liu, Z., Zhang, X., Sun, Y., & Zhou, Y. (2023). Advanced controls on energy reliability, flexibility, resilience, and occupant-centric control for smart and energy-efficient buildings—a state-of-the-art review. *Energy and Buildings*, 113436. <https://doi.org/10.1016/j.enbuild.2023.113436>
- Machado, J., Sousa, R., Peixoto, H., & Abelha, A. (2024). Ethical Decision-Making in Artificial Intelligence: A Logic Programming Approach. *AI*, 5(4), 2707-2724. <https://doi.org/10.3390/ai5040130>
- Mahadevan, R. K., & Gurusamy, M. (2021). Adaptive Headlight Control System. *Journal of Physics: Conference Series*, 1742-6596. <https://doi.org/10.1088/1742-6596/1969/1/012059>
- Manakitsa, N., Maraslidis, G. S., Moysis, L., & Fragulis, G. F. (2024). A review of machine learning and deep learning for object detection, semantic segmentation, and human action recognition in machine and robotic vision. *Technologies*, 12(2), 15. <https://doi.org/10.3390/technologies12020015>
- Mande, S., & Ramachandran, N. (2024). A Comprehensive Survey on Challenges and Issues in V2X and V2V Communication in 6G Future Generation Communication Models. *Ingenierie des Systemes d'Information*, 29(3), 951. <https://doi.org/10.18280/isi.290315>
- Mathurkar, S. P., & Satal, S. P. (2024). Energy Efficiency of Headlight Intensity Control in Electric Vehicles. *Advance Research in Power Electronics and Devices*, 10-16. <https://matjournals.net/engineering/index.php/ARPED/article/view/814>
- Mazzi, Y., Sassi, H. B., Errahimi, F., & Es-Sbai, N. (2024). A soft actor-critic reinforcement learning framework for optimal energy management in electric vehicles with hybrid storage. *Journal of Energy Storage*, 99, 113344. <https://doi.org/10.1016/j.est.2024.113344>
- Mehta, A., Padaria, A. A., Bavisi, D., Ukani, V., Thakkar, P., Geddam, R., Kotecha, K., & Abraham, A. (2023). Securing the Future: A Comprehensive Review of Security Challenges and Solutions in Advanced Driver Assistance Systems. *IEEE Access*. <https://doi.org/10.1109/ACCESS.2023.3347200>
- Morden, J. N., Caraffini, F., Kypraios, I., Al-Bayatti, A. H., & Smith, R. (2023). Driving in the Rain: A Survey toward Visibility Estimation through Windshields. *International Journal of Intelligent Systems*, 2023(1), 9939174. <https://doi.org/10.1155/2023/9939174>
- Munsi, M. S., & Chaoui, H. (2024). Energy Management Systems for Electric Vehicles: A Comprehensive Review of Technologies and Trends. *IEEE Access*. <https://doi.org/10.1109/ACCESS.2024.3371483>
- Nkrumah, J. K., Cai, Y., & Jafaripournimchahi, A. (2024). A review of automotive intelligent and adaptive headlight beams intensity control approaches. *Advances in Mechanical Engineering*, 16(4), 16878132231220355. <https://doi.org/10.1177/16878132231220355>
- Nkrumah, J. K., Cai, Y., Jafaripournimchahi, A., Wang, H., & Atindana, V. A. (2024). Highway Safety with an Intelligent Headlight System for Improved Nighttime Driving. *Sensors*, 24(22), 7283. <https://doi.org/10.3390/s24227283>
- Nourbakhshrezaei, A., Jadidi, M., & Sohn, G. (2023). Improving Cyclists' Safety Using Intelligent Situational Awareness System. *Sustainability*, 15(4), 2866. <https://doi.org/10.3390/su15042866>
- Olawade, D. B., Wada, O. Z., David-Olawade, A. C., Fapohunda, O., Ige, A. O., & Ling, J.

- (2024). Artificial intelligence potential for net zero sustainability: Current evidence and prospects. *Next Sustainability*, 4, 100041. <https://doi.org/10.1016/j.nxsust.2024.100041>
- Papadopoulos, C., Kollias, K.-F., & Fragulis, G. F. (2024). Recent Advancements in Federated Learning: State of the Art, Fundamentals, Principles, IoT Applications and Future Trends. *Future Internet*, 16(11), 415. <https://doi.org/10.3390/fi16110415>
- Parambil, M. M. A., Rustamov, J., Ahmed, S. G., Rustamov, Z., Awad, A. I., Zaki, N., & Alnajjar, F. (2024). Integrating AI-based and conventional cybersecurity measures into online higher education settings: Challenges, opportunities, and prospects. *Computers and Education: Artificial Intelligence*, 100327. <https://doi.org/10.1016/j.caeai.2024.100327>
- Qi, Y., Cao, J., & Wu, B. (2024). Bidirectional Q-learning for recycling path planning of used appliances under strong and weak constraints. *Communications in Transportation Research*, 4, 100153. <https://doi.org/10.1016/j.commtr.2024.100153>
- Qiu, D., Wang, Y., Hua, W., & Strbac, G. (2023). Reinforcement learning for electric vehicle applications in power systems: A critical review. *Renewable and Sustainable Energy Reviews*, 173, 113052. <https://doi.org/10.1016/j.rser.2022.113052>
- Rana, K., Gupta, G., Vaidya, P., & Khari, M. (2023). The perception systems used in fully automated vehicles: a comparative analysis. *Multimedia Tools and Applications*, 1-23. <https://doi.org/10.1007/s11042-023-15090-w>
- Rani, S., & Jayapragash, R. (2024). Review on electric mobility: trends, challenges and opportunities. *Results in Engineering*, 102631. <https://doi.org/10.1016/j.rineng.2024.102631>
- Rezaee, M. R., Hamid, N. A. W. A., Hussin, M., & Zukarnain, Z. A. (2024). Comprehensive Review of Drones Collision Avoidance Schemes: Challenges and Open Issues. *IEEE Transactions on Intelligent Transportation Systems*. <https://doi.org/10.1109/TITS.2024.3375893>
- Santos, P. P., Carvalho, D. S., Sardinha, A., & Melo, F. S. (2024). The impact of data distribution on Q-learning with function approximation. *Machine Learning*, 1-23. <https://doi.org/10.1007/s10994-024-06564-5>
- Sharma, K., & Shivandu, S. K. (2024). Integrating artificial intelligence and Internet of Things (IoT) for enhanced crop monitoring and management in precision agriculture. *Sensors International*, 100292. <https://doi.org/10.1016/j.sintl.2024.100292>
- Song, Y., Wu, Y., Guo, Y., Yan, R., Suganthan, P. N., Zhang, Y., ... & Feng, Q. (2024). Reinforcement learning-assisted evolutionary algorithm: A survey and research opportunities. *Swarm and Evolutionary Computation*, 86, 101517. <https://doi.org/10.1016/j.swevo.2024.101517>
- Souri, A., Zarei, M., Hemmati, A., & Gao, M. (2024). A systematic literature review of vehicular connectivity and V2X communications: Technical aspects and new challenges. *International Journal of Communication Systems*, e5780. <https://doi.org/10.1002/dac.5780>
- Srinivasan, A. (2023). Reinforcement Learning: Advancements, Limitations, and Real-world Applications. *Interantional J. Sci. Res. Eng. Manag*, 7(08). <http://dx.doi.org/10.55041/IJSREM25118>

Risks Reducing Through Intelligent Headlight Management: Optimizing Q-Learning for Electric Vehicles

- Sutton, R. S. (2018). Reinforcement learning: An introduction. *A Bradford Book*. <https://courses.cs.umbc.edu/graduate/678/spring17/RL-3.pdf>
- Tang, H. H., & Ahmad, N. S. (2024). Fuzzy logic approach for controlling uncertain and nonlinear systems: a comprehensive review of applications and advances. *Systems Science & Control Engineering*, 12(1), 2394429. <https://doi.org/10.1080/21642583.2024.2394429>
- Taye, M. M. (2023). Understanding of machine learning with deep learning: architectures, workflow, applications and future directions. *Computers*, 12(5), 91. <https://doi.org/10.3390/computers12050091>
- Tresca, L., Pulvirenti, L., Rolando, L., & Millo, F. (2024). Development of a deep Q-learning energy management system for a hybrid electric vehicle. *Transportation Engineering*, 16, 100241. <https://doi.org/10.1016/j.treng.2024.100241>
- Vaibhav, R., Amutha Prabha, N., Indragandhi, V., Bharathidasan, M., Vasantharaj, S., & Alaric, J. S. (2022). Autonomous braking system using linear actuator. *Journal of Sensors*, 2022(1), 7707600. <https://doi.org/10.1155/2022/7707600>
- Vaidya, B., & Mouftah, H. T. (2020). Smart electric vehicle charging management for smart cities. *IET Smart Cities*, 2(1), 4-13. <https://doi.org/10.1049/iet-smc.2019.0076>
- Vashishtha, K., Saad, A., Faieghi, R., & Xi, F. (2024). Intelligent adaptive lighting algorithm: Integrating reinforcement learning and fuzzy logic for personalized interior lighting. *Engineering Applications of Artificial Intelligence*, 133, 108512. <https://doi.org/10.1016/j.engappai.2024.108512>
- Waykole, S., Shiwakoti, N., & Stasinopoulos, P. (2021). Review on lane detection and tracking algorithms of advanced driver assistance system. *Sustainability*, 13(20), 11417. <https://doi.org/10.3390/su132011417>
- Wei, Z., Peng, T., & Wei, S. (2022). A robust adaptive traffic signal control algorithm using Q-learning under mixed traffic flow. *Sustainability*, 14(10), 5751. <https://doi.org/10.3390/su14105751>
- Xu, S., Liu, Q., Hu, Y., Xu, M., & Hao, J. (2023). Decision-making models on perceptual uncertainty with distributional reinforcement learning. *Green Energy and Intelligent Transportation*, 2(2), 100062. <https://doi.org/10.1016/j.geits.2022.100062>
- Yang, W., Zhou, Y., Zhang, Y., & Ren, Y. (2024). Reinforcement Q-Learning for PDF Tracking Control of Stochastic Systems with Unknown Dynamics. *Mathematics*, 12(16), 2499. <https://doi.org/10.3390/math12162499>
- Ying, Z., Wang, K., Xiong, J., & Ma, M. (2024). A literature review on V2X communications security: Foundation, solutions, status, and future. *IET Communications*. <https://doi.org/10.1049/cmu2.12778>
- Yusuf, S. A., Khan, A., & Souissi, R. (2024). Vehicle-to-everything (V2X) in the autonomous vehicles domain—A technical review of communication, sensor, and AI technologies for road user safety. *Transportation Research Interdisciplinary Perspectives*, 23, 100980. <https://doi.org/10.1016/j.trip.2023.100980>
- Zakaria, M., Hamed, M., Yaser, E., Mahmoud, M., Rooby, M., & Anis, A. M. (2024). Adaptive Headlight Control and Real-Time Pedestrian Detection. *International Journal of Computer Applications*, 186(34), 18-25. <http://dx.doi.org/10.5120/ijca2024923902>

Pitchaya Jamjuntr, Chanchai Techawatcharapaikul, Pannee Suanpang/ Oper. Res. Eng. Sci. Theor. Appl. 7(3)2024 86-123

- Zhang, Y., Carballo, A., Yang, H., & Takeda, K. (2023). Perception and sensing for autonomous vehicles under adverse weather conditions: A survey. *ISPRS Journal of Photogrammetry and Remote Sensing*, 196, 146-177. <https://doi.org/10.1016/j.isprsjprs.2022.12.021>
- Zhang, W., Liu, H., Wang, F., Xu, T., Xin, H., Dou, D., & Xiong, H. (2021, April). Intelligent electric vehicle charging recommendation based on multi-agent reinforcement learning. In Proceedings of the Web Conference 2021 (pp. 1856-1867). <https://doi.org/10.1145/3442381.3449934>
- Zhong, Y., & Wang, Y. (2025). Cross-regional path planning based on improved Q-learning with dynamic exploration factor and heuristic reward value. *Expert Systems with Applications*, 260, 125388. <https://doi.org/10.1016/j.eswa.2024.125388>
- Zhou, H., Xu, W., Chen, J., & Wang, W. (2020). Evolutionary V2X technologies toward the Internet of vehicles: Challenges and opportunities. *Proceedings of the IEEE*, 108(2), 308-323. <https://doi.org/10.1109/JPROC.2019.2961937>
- Zhou, Y., Zanette, A., Pan, J., Levine, S., & Kumar, A. (2024). Archer: Training language model agents via hierarchical multi-turn rl. *arXiv preprint arXiv:2402.19446*. <https://doi.org/10.48550/arXiv.2402.19446>